
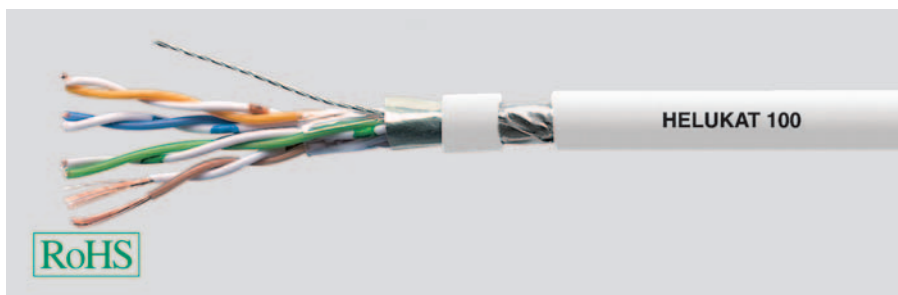


LAN Cable

Category 5

HELUKAT® 100

F/UTP flex



Cable structure

Inner conductor diameter:

Conductor material:

Core insulation:

Core colours:

Shielding 1:

Screen over stranding element:

Screen 1 over stranding:

Screen 2 over stranding:

Drain wire:

Outer sheath material:

Outer diameter:

Outer sheath colour:

F/UTP 4x2xAWG 26/7 FRNC

0,48 mm

Copper, bare

PO

whbu/bu, whog/og, whgn/gn, whbn/bn

Polyester foil over stranded bundle

-

Polyester foil, aluminium-lined


-

yes

FRNC

approx. 5,7 mm

Grey similar to RAL 7035

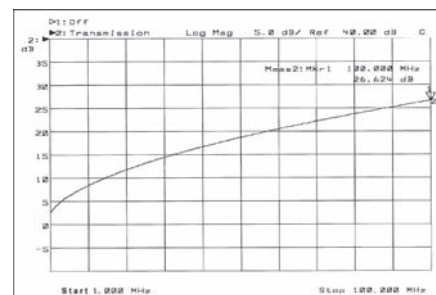

Electrical data

Characteristic impedance:

Loop resistance:

Mutual capacitance:

Rel. propagation velocity:

100 Ohm \pm 15 ohm at 1 to 100 MHz

290 Ohm/km max.

50 nF/km nom.

74 %

Typical values

Frequency (MHz)	10	16	62,5	100
Attenuation (dB/10m)	0,9	1,2	2,4	2,9
Next (db)	58,0	56,0	45,0	43,0
ACR (db)	57,1	54,8	42,6	40,1

Technical data

Weight:

bending radius, repeated:

Operating temperature range min.:

Operating temperature range max.:

Caloric load, approx. value:

Copper weight:

approx. 31 kg/km

40 mm

-20°C

+60°C

0,527 MJ/m

14,00 kg/km

Norms

Acc. to ISO/IEC 11801, Acc. to EN 50173, Acc. to EIA/TIA 568-A, Category 5, Flame-retardant acc. to IEC 60332-1, Smoke density acc. to IEC 61034, Halogen-free acc. to 60754-2, Corrosiveness acc. to EN50267-2-3

Application

HELUKAT®100 data cables are used in the tertiary level of a network as patch cables and connection cables. They are characterized by large performance reserves and outstanding performance. They can be used to implement services such as Fast Ethernet, Ethernet, ATM155, FDDI, token ring 4/16 Mbit/s, or ISDN absolutely trouble-free. With its optimized construction, the HELUKAT®100 series can be manufactured quickly and easily with all common RJ45 plugs.

Part no.

81278, F/UTP 4x2xAWG 26/7 FRNC (FTP)

Dimensions and specifications may be changed without prior notice.

