


# Pre-assembled fan cables

## for fixed laying

Base line for use on LENZE drive systems of the type Global Drive

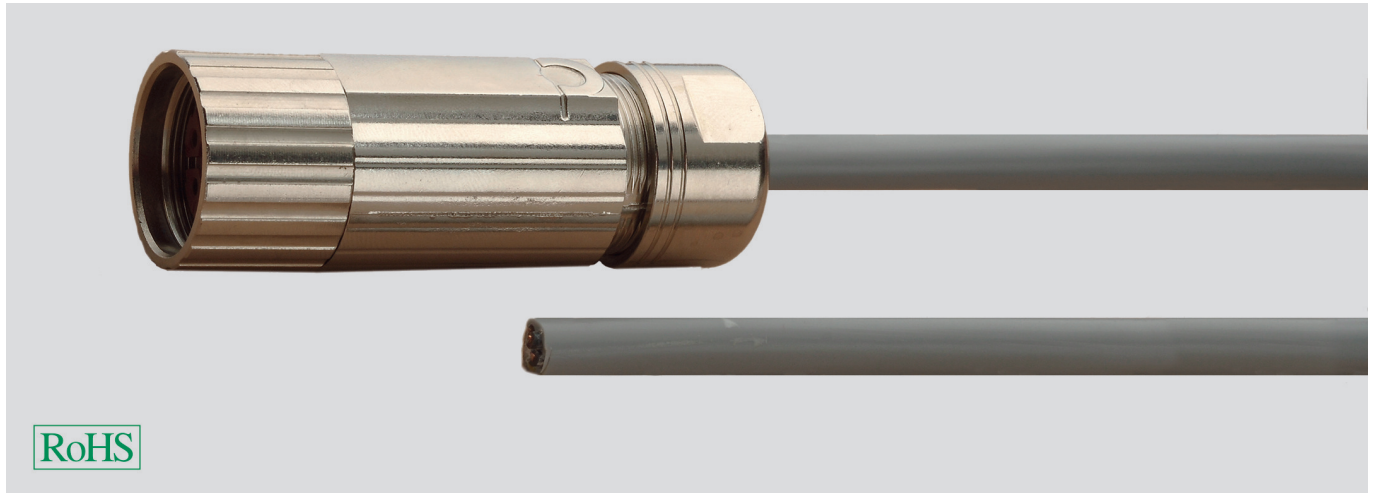

RoHS

### Technical data

- **Temperature range**  
flexing -5°C to +70°C  
fixed installation -40°C to +70°C
- **Minimum bending radius**  
flexing 8x cable Ø  
fixed installation 4x cable Ø
- **Nominal voltage**  
HAR U<sub>0</sub>/U 300/500 V  
UL/CSA 600 V
- **Test voltage** power cores 3 kV
- **Insulation resistance** ≥ 20 MOhm x km

### Approbations

UL/CSA

### Cable structure

- Bare copper conductor, fine wire stranded
- PVC core insulation
- Core identification 1, 2, 3
- GN-YE conductor
- PVC outer sheath
- Sheath colour grey

### Application

This high quality pre-assembled fan cable is specially manufactured for applications with static installation. The special PVC outer sheath allows use in many industrial environments of general machine and plant construction.

### Characteristic

Economical alternatives to the cable carrier compatible cable types which otherwise meet all requirements of the servo drive manufacturers. These pre-assembled cables can be produced in any lengths and also with customer-specific modifications.

### Note

Please observe the drive or controller manufacturer's information about maximum permitted cable length. The prefabricated cables listed here are not original parts, but accessories manufactured by the company HELUKABEL® GmbH. The data, standards and approvals relate solely to the bulk goods used.

Manufacturer Designation	Helukabel Designation	Helukabel Part no.
EWLLxxxGM	fan cables GM	660351

Dimensions and specifications may be changed without prior notice.