
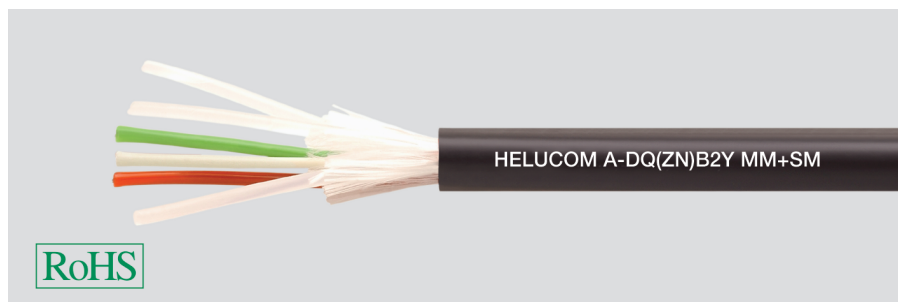


# Fibre Optic Outdoor Cable

acc. DIN VDE 0888

HELUCOM®

A-DQ(ZN)B2Y fibre combi, stranded



## Cable structure

Core type: Loose tube  
GRP support element  
Strain relief elements: Glass yarns  
Type of armouring: Glass yarns  
Outer sheath material: PE  
Outer sheath colour: Black

## Temperature range

Laying, min.: -5°C  
Laying, max.: +50°C  
Operating, min.: -20°C  
Operating, max.: +60°C

## Other data

Corrosiveness acc. to EN50267-2-3  
Halogen-free acc. to 60754-2  
Longitudinally water-tight acc. to IEC 60794-1-2-F5  
UV-resistant

Designation	No. of fibres	Fibre type	Fibre category	Number of fibres per core	Outer Ø app. mm	Max. tensile force N	Min. stat. bending radius mm	Caloric load app. MJ / m	Max. transverse pressure N / cm	Weight kg / km	Part no.
A-DQ(ZN)B2Y	24	Single- and multimode G50/125	OM2 + ITU-T G.652	12	10,5	2700	200,0	2,70	600	95,0	<b>81478</b>
A-DQ(ZN)B2Y	48	Single- and multimode G50/125	OM2 + ITU-T G.652	12	10,5	2700	200,0	2,70	600	95,0	<b>801183</b>

Dimensions and specifications may be changed without prior notice.

## Application

These HELUCOM® fibre-optic cables are characterized by a design that is particularly easy to mount, extremely tension-resistant and rodent-proof. Around a stranded grooved cable and filler elements, there is a composite of glass yarns and swelling fleece with characteristics that ensure rodent protection, strain relief and waterproofing in longitudinal direction of the cable. In addition, these cables are designed grease-free. Wiping the jelly off is therefore unnecessary. This construction is particularly used in underground, tubes and channel areas, where above-average tensile stresses and/or transverse compressions occur and rodent infestation is to be expected.