


Patch-Panels RJ45



Category 6 / Class E

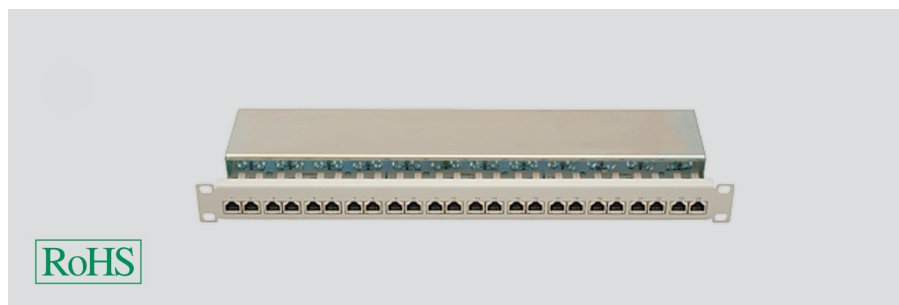

Type

Configuration

Housing material:	Steel plate, solid
Colour:	Grey similar to RAL 7035
Board:	3x8 mother board, colour and number-coded
Push-on connector type:	RJ45(8/8)
Number of bushes:	24
Type of screen:	Overall screen
Screen removal:	via continuous screening tape
Strain relief:	via pre-installed cable clips
Cover lock:	Quick-action snap cover

Connecting system

Connection type:	LSA plus - insulation piercing connections
Suitable for cable diameter:	0.4 - 0.64mm (AWG 26 - 22)
Insulation diameter, min.:	0,7 - 1,7 mm (PE)

Assignment type

EIA/TIA 568 A + EIA/TIA 568 B

Dimension

Width:	483 mm
Depth:	148 mm
Number of height modules (HM):	1
Fastening dimensions:	19"

Norms and standards

HELUKAT® CONNECTING SYSTEMS® system component up to 250 MHz in the permanent link of category 6 / Class E in accordance with ISO 11801, 2nd edition, EN 50173, 2nd edition, EIA/TIA 568 B, and EN 55022 (EMC).

Application

As floor distributor in applications of digital and analog image, data and voice transmission.

Part no.

82848

Dimensions and specifications may be changed without prior notice.

Packing unit

1