

# Solderless terminals

insulated



### Insulated solderless terminals


PA insulated solderless terminals for cross sections of 0.25 to 6.0mm².  
Simple cable inlet through Easy-Entry (expanded sleeve).  
Insulated with high dielectric strength.

### Material

Sleeve: Copper  
Surface: tinned  
  
Insulation: Partially-insulated, PA

### Technical data

Temperature range: -60°C up to +125°C

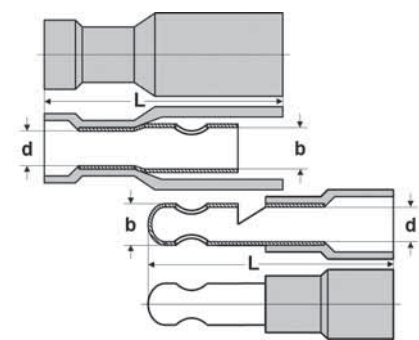

### round pin plugs

Part no.	Type	Colour	Cross-section mm²	Connection bolts M	Design	Unit	Net EUR/100 items at a purchase of		
							up to 500	501 - 1000	1001 - 5000
91422	HABM	red	0,5 - 1,5	-	Plug	100	o. r.	o. r.	o. r.
91423	HAB	red	0,5 - 1,5	-	Sleeve	100	o. r.	o. r.	o. r.
91424	HB 5BM	blue	1,5 - 2,5	-	Plug	100	o. r.	o. r.	o. r.
91425	HB 5B	blue	1,5 - 2,5	-	Sleeve	100	o. r.	o. r.	o. r.
96594	HC 5BM	yellow	2,5 - 6,0	-	Plug	100	o. r.	o. r.	o. r.
96595	HC 5B	yellow	2,5 - 6,0	-	Sleeve	100	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request