

# LAN Cable

Category 6

**HELUKAT® 300**

U/FTP, UL



## Cable structure

Inner conductor diameter:

Conductor material:

Core insulation:

Core colours:

Shielding 1:

Screen over stranding element:

Screen 1 over stranding:

Screen 2 over stranding:

Drain wire:

Outer sheath material:

Outer diameter:

Outer sheath colour:

## U/FTP 4x2xAWG 26/7 PVC, UL

0,48 mm

Copper, tinned

Foam-skin-PE

whbu/bu, whog/og, whgn/gn, whbn/bn

Polyester foil over stranded bundle

Polyester foil, aluminium-lined

-


-

yes

PVC

approx. 5,9 mm

Grey similar to RAL 7035

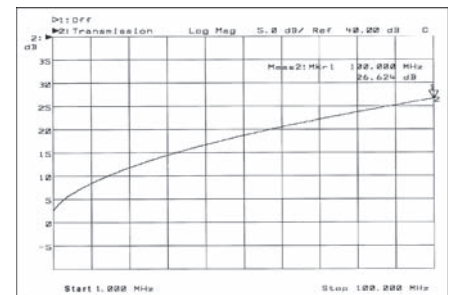

## Electrical data

Characteristic impedance:

100 Ohm  $\pm$  15 ohm at 1 to 100 MHz

100 Ohm  $\pm$  20 ohm at 101 to 300 MHz

Loop resistance:

290 Ohm/km max.

Mutual capacitance:

45 nF/km nom.

Rel. propagation velocity:

77 %

## Typical values

Frequency (MHz)	10	16	62,5	100	200	300
Attenuation (db/10m)	0,9	1,1	2,2	2,7	3,9	4,7
Next (db)	90,0	88,0	83,0	80,0	76,0	73,0
ACR (db)	89,1	86,9	80,8	77,3	72,1	68,3

## Technical data

Weight:

approx. 37 kg/km

bending radius, repeated:

48 mm

Operating temperature range min.:

-20°C

Operating temperature range max.:

+60°C

Caloric load, approx. value:


0,41 MJ/m

Copper weight:

20,00 kg/km

## Norms

Acc. to ISO/IEC 11801, Acc. to EN 50173, Acc. to EIA/TIA 568-A, Category 6, Flame-retardant acc. to IEC 60332-1, Smoke density acc. to IEC 61034, CMX 444

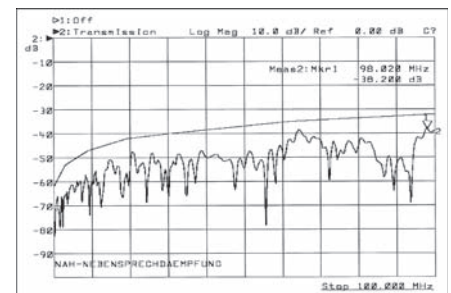

## Application

HELUKAT®300 data cables are used in the tertiary level of a network as patch cables and connection cables. They are characterized by large performance reserves and outstanding performance. They can be used to implement services such as Gigabit Ethernet, Fast Ethernet, Ethernet, ATM155, FDDI, token ring 4/16 Mbit/s, or ISDN absolutely trouble-free. With its optimized construction, the HELUKAT®300 series can be manufactured quickly and easily with all common RJ45 plugs. This type is certified according to UL because of the special PVC jacket.

## Part no.

**802174,** U/FTP 4x2xAWG 26/7 PVC

Dimensions and specifications may be changed without prior notice.