

HSK-INOX cable gland

stainless steel



HSK-INOX

The stainless steel cable gland

- Easy to assemble
- Completely water-tight
- Optimum strain relief
- Large clamping areas

Material

Stainless steel 1.4305 / AISI 303

Clamp: Polyamide

Moulded seal: NBR

O-ring: NBR

Technical data


Protection class: IP 68 - 10 bar / IP 69K

Temperature range: -40°C up to +100°C

Test standard: EN50262

Application

- Plant and machine construction
- Automation technology
- Installation technology

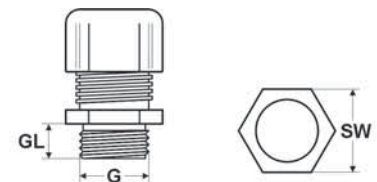

Dimensions

G Thread size
GL Thread length
SW Spanner size

metric thread

Part no.	Size Metr.	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
98076	M12 x 1,5	3,0 - 6,5	6,5	14	10	o. r.	o. r.	o. r.
98078	M16 x 1,5	5,0 - 10,0	6,0	22	10	o. r.	o. r.	o. r.
98080	M20 x 1,5	10,0 - 14,0	6,0	24	10	o. r.	o. r.	o. r.
98082	M25 x 1,5	13,0 - 18,0	7,0	30	10	o. r.	o. r.	o. r.
98084	M32 x 1,5	18,0 - 25,0	8,0	41	5	o. r.	o. r.	o. r.
98086	M40 x 1,5	22,0 - 32,0	8,0	50	5	o. r.	o. r.	o. r.
905734	M50 x 1,5	32,0 - 38,0	9,0	60	5	o. r.	o. r.	o. r.
905736	M63 x 1,5	37,0 - 44,0	10,0	64 / 68	5	o. r.	o. r.	o. r.

metric thread - with reducing seal

Part no.	Size Metr.	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
98077	M12 x 1,5	2,0 - 5,0	6,5	14	10	o. r.	o. r.	o. r.
98079	M16 x 1,5	3,0 - 7,0	6,0	22	10	o. r.	o. r.	o. r.
98081	M20 x 1,5	7,0 - 12,0	6,0	24	10	o. r.	o. r.	o. r.
98083	M25 x 1,5	9,0 - 16,0	7,0	30	10	o. r.	o. r.	o. r.
98085	M32 x 1,5	13,0 - 20,0	8,0	41	5	o. r.	o. r.	o. r.
98087	M40 x 1,5	20,0 - 26,0	8,0	50	5	o. r.	o. r.	o. r.
905733	M50 x 1,5	25,0 - 31,0	9,0	60	5	o. r.	o. r.	o. r.
905735	M63 x 1,5	29,0 - 35,0	10,0	64 / 68	5	o. r.	o. r.	o. r.

Continuation ►

o. r. = on request

HSK-INOX cable gland

stainless steel



PG thread

Part no.	Size PG	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
90210	7	3,0 - 6,5	5,0	14	10	O. r.	O. r.	O. r.
90212	9	4,0 - 8,0	6,0	17	10	O. r.	O. r.	O. r.
90214	11	5,0 - 10,0	6,0	22	10	O. r.	O. r.	O. r.
90216	13,5	6,0 - 12,0	6,5	22	10	O. r.	O. r.	O. r.
90218	16	10,0 - 14,0	6,5	24	10	O. r.	O. r.	O. r.
90377	21	13,0 - 18,0	7,0	30	10	O. r.	O. r.	O. r.
98286	29	18,0 - 25,0	8,0	41	5	O. r.	O. r.	O. r.
98288	36	22,0 - 32,0	8,0	50	5	O. r.	O. r.	O. r.
905738	42	32,0 - 38,0	9,0	57	5	O. r.	O. r.	O. r.
905740	48	37,0 - 44,0	10,0	64	5	O. r.	O. r.	O. r.

PG thread - with reducing seal

Part no.	Size PG	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
90211	7	2,0 - 5,0	5,0	14	10	O. r.	O. r.	O. r.
90213	9	2,0 - 6,0	6,0	17	10	O. r.	O. r.	O. r.
90215	11	3,0 - 7,0	6,0	22	10	O. r.	O. r.	O. r.
90217	13,5	5,0 - 9,0	6,5	22	10	O. r.	O. r.	O. r.
90219	16	7,0 - 12,0	6,5	24	10	O. r.	O. r.	O. r.
90378	21	9,0 - 16,0	7,0	30	10	O. r.	O. r.	O. r.
98287	29	13,0 - 20,0	8,0	41	5	O. r.	O. r.	O. r.
98289	36	20,0 - 26,0	8,0	50	5	O. r.	O. r.	O. r.
905737	42	25,0 - 31,0	9,0	57	5	O. r.	O. r.	O. r.
905739	48	29,0 - 35,0	10,0	64	5	O. r.	O. r.	O. r.

NPT thread

Part no.	Size NPT	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
905742	3/8"	4,0 - 8,0	15,0	17 / 19	5	O. r.	O. r.	O. r.
905744	1/2"	6,0 - 12,0	13,0	22 / 24	10	O. r.	O. r.	O. r.
905746	3/4"	13,0 - 18,0	13,0	30	5	O. r.	O. r.	O. r.
905748	1"	18,0 - 25,0	19,0	41	10	O. r.	O. r.	O. r.

NPT thread - with reducing seal

Part no.	Size NPT	Cable Ø from / to mm	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
						up to 100	101 - 500	501 - 1000
905741	3/8"	2,0 - 6,0	15,0	17 / 19	5	O. r.	O. r.	O. r.
905743	1/2"	5,0 - 9,0	13,0	22 / 24	5	O. r.	O. r.	O. r.
905745	3/4"	9,0 - 16,0	13,0	30	5	O. r.	O. r.	O. r.
905747	1"	13,0 - 20,0	19,0	41	10	O. r.	O. r.	O. r.

Dimensions and specifications may be changed without prior notice.

O. r. = on request