


Fibre Optic Breakout Cable robust, flexible

HCS UL/CSA

HELUCOM®
I-V(ZN)YY

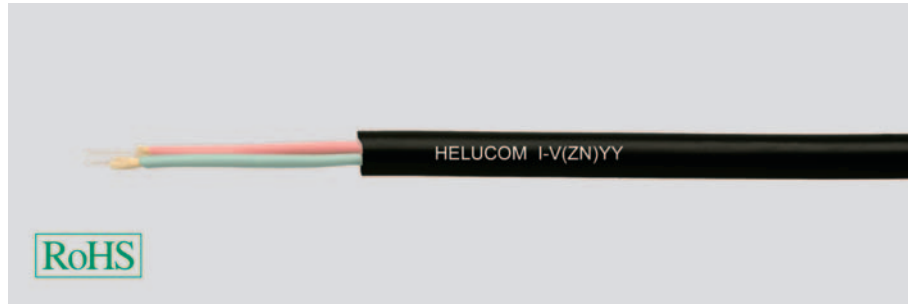

Cable structure

Core type: Composite buffered
Strain relief elements: Aramide
Outer sheath material: PVC
Outer sheath colour: Black

Temperature range

Laying, min.: -20°C
Laying, max.: +75°C
Operating, min.: -30°C
Operating, max.: +85°C

Other data

Flame-resistance acc. to IEC 60332-1 and IEC 60332-3
UV-resistant
Oil-resistant

Designation	Number of fibres	Fibre type	Number of fibres per core	Outer Ø approx. mm	Max. tensile force N	Min. stat. bending radius mm	Caloric load approx. MJ / m	Max. transverse pressure N / cm	Weight kg / km	Part no.
I-V(ZN)YY	2	HCS 200/230	1	7,5	800	100,0	1,40	300	68,0	801733

Dimensions and specifications may be changed without prior notice.

Application

This HELUCOM® HCS fibre cable is suitable for fixed and normal flexible installations. Possible applications are normal and heavy-duty mechanical requirements for example in industrial environments. Because of a special PVC jacket this construction is certified by UL (FT1 and FT4). With the tight buffer construction, direct plug manufacturing, even on site, poses no problems. With a HCS fibre transmission lengths of up to 300m can be achieved.