


JUMBO PUR oversize corrugated tubes, polyurethane

for maximum mechanical applications

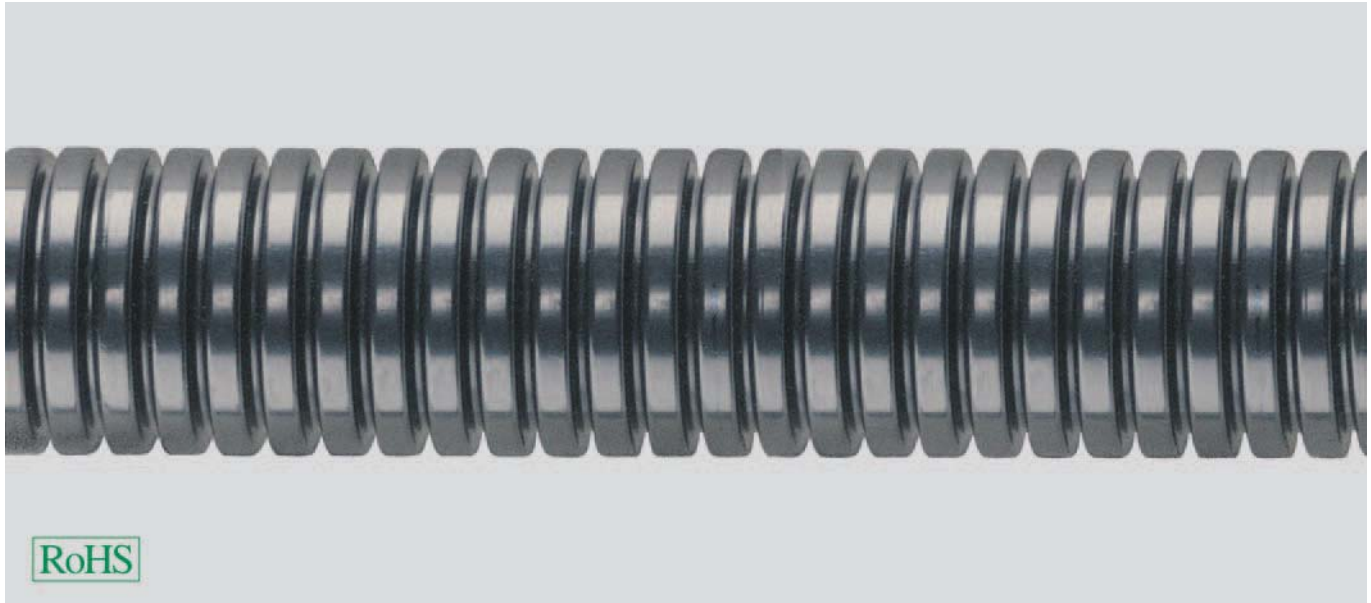

JUMBO PUR

Cable protection tube for maximum duty robot applications.

- Lowest reset quality
- High abrasion resistance

Application

- Robots
- Handling systems
- Vehicle construction
- Drag chains

Material

Mod. Polyurethane PUR

Flammability acc. to UL 94: HB

- halogen-free
- cadmium-free

Properties

resistant to a multitude of

- fuels
- mineral oils
- greases
- weak bases
- weak acids

Note

Suitable connection glands:
JUMBO gland
Bending behaviour: very good

Technical data

Temperature range: -40°C up to +125°C
Temperature range temporary up to +140°C

Capacity/100mm: approx. 500 N / 800 N

Part no. black	trade size mm	Inner Ø mm	Outer Ø mm	Bending radius mm	Per metres	Net EUR/100 metres at a purchase of		
						up to 100	101 - 500	501 - 1000
920382	70	66,5	79,9	160,0	10	o. r.	o. r.	o. r.
920383	95	91,0	105,9	210,0	10	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request