


KA aluminum compression cable lug - straight

not insulated

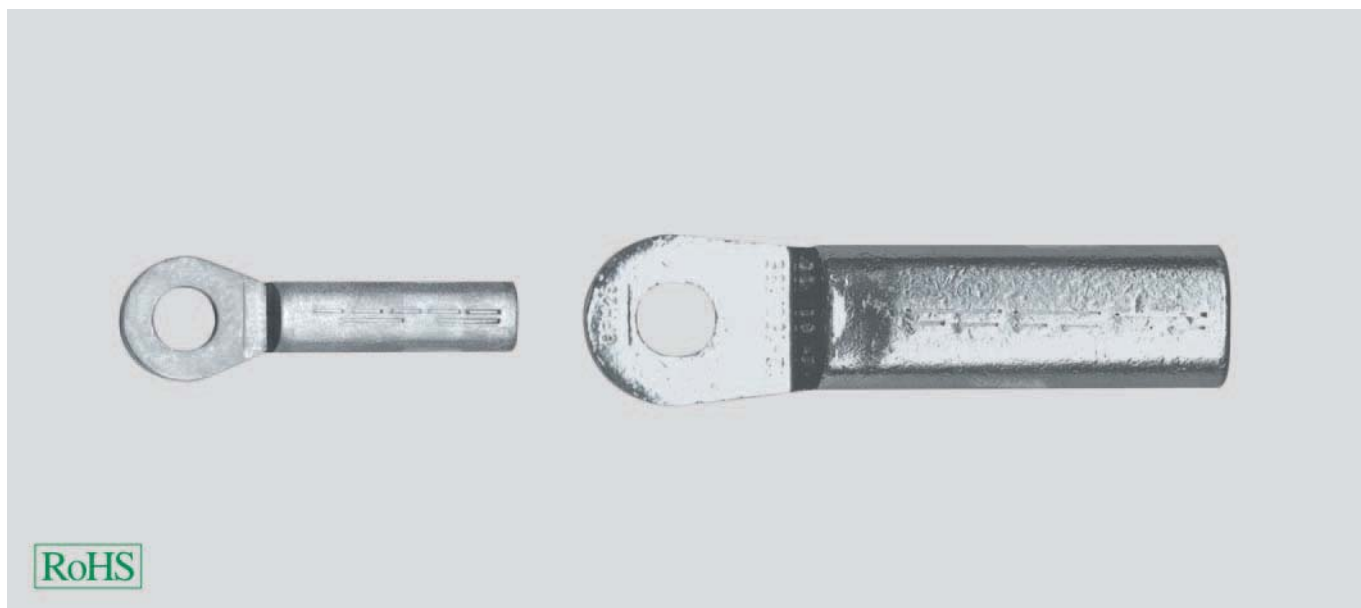

Tubular cable lug KA


Non-insulated, straight tubular cable lugs in eye type design made by aluminum. High definition version for reliable crimping. Designed for conductor type RM acc. to DIN 48201 and circular reshaped conductors.

Material

Aluminium
Surface: bare

Note

Code type indicates the required hexagonal clamping insert.



Dimensions

- a Diameter of the boring
- d Inner diameter of the cable inclusion
- b Flange width
- l Length till middle of the boring

eye type

Part no.	Type	Cross-section RM/SM - SE mm ²	a mm	d mm	b mm	l mm	Code type	Weight kg / 1000 items	Unit	Net EUR/100 items at a purchase of		
										up to 500	501 - 1000	1001 - 5000
904695	KA 10-6	10,0	6,5	5,0	16,0	52,0	10,0	8,6	25	o. r.	o. r.	o. r.
904696	KA 10-8	10,0	8,5	5,0	18,0	52,0	10,0	8,8	25	o. r.	o. r.	o. r.
904697	KA 16-8	16,0 - 25,0	8,5	5,8	18,0	52,0	12,0	13,7	10	o. r.	o. r.	o. r.
904698	KA 16-10	16,0 - 25,0	10,5	5,8	18,0	52,0	12,0	13,9	10	o. r.	o. r.	o. r.
904699	KA 25-8	25,0 - 35,0	8,5	6,8	18,0	60,0	12,0	14,1	10	o. r.	o. r.	o. r.
904700	KA 25-10	25,0 - 35,0	10,5	6,8	18,0	60,0	12,0	14,6	10	o. r.	o. r.	o. r.
904701	KA 35-10	35,0 - 50,0	10,5	8,0	21,0	67,0	14,0	20,8	10	o. r.	o. r.	o. r.
904702	KA 35-12	35,0 - 50,0	13,0	8,0	21,0	67,0	14,0	20,5	10	o. r.	o. r.	o. r.
904703	KA 50-10	50,0 - 70,0	10,5	9,8	25,0	72,0	16,0	26,8	10	o. r.	o. r.	o. r.
904704	KA 50-12	50,0 - 70,0	13,0	9,8	25,0	72,0	16,0	27,3	10	o. r.	o. r.	o. r.
904705	KA 70-10	70,0 - 95,0	10,5	11,2	28,0	86,0	18,0	44,2	10	o. r.	o. r.	o. r.
904706	KA 70-12	70,0 - 95,0	13,0	11,2	28,0	86,0	18,0	42,7	10	o. r.	o. r.	o. r.
904707	KA 95-10	95,0 - 120,0	10,5	13,2	32,0	90,0	22,0	74,0	4	o. r.	o. r.	o. r.
904708	KA 95-12	95,0 - 120,0	13,0	13,2	32,0	90,0	22,0	75,0	4	o. r.	o. r.	o. r.
904709	KA 95-16	95,0 - 120,0	17,0	13,2	34,0	90,0	22,0	73,0	4	o. r.	o. r.	o. r.
904710	KA 120-12	120,0 - 150,0	13,0	14,7	32,0	91,0	22,0	66,8	4	o. r.	o. r.	o. r.
904711	KA 120-16	120,0 - 150,0	17,0	14,7	34,0	91,0	22,0	64,1	4	o. r.	o. r.	o. r.
904712	KA 150-12	150,0 - 185,0	13,0	16,3	35,0	103,0	25,0	96,4	4	o. r.	o. r.	o. r.
904713	KA 150-16	150,0 - 185,0	17,0	16,3	35,0	103,0	25,0	92,4	4	o. r.	o. r.	o. r.
904714	KA 150-20	150,0 - 185,0	21,0	16,3	41,0	103,0	25,0	94,0	4	o. r.	o. r.	o. r.
904715	KA 185-12	185,0 - 240,0	13,0	18,3	40,0	106,0	28,0	126,1	1	o. r.	o. r.	o. r.
904716	KA 185-16	185,0 - 240,0	17,0	18,3	40,0	106,0	28,0	119,2	1	o. r.	o. r.	o. r.
904717	KA 185-20	185,0 - 240,0	21,0	18,3	40,0	106,0	28,0	131,0	1	o. r.	o. r.	o. r.
904718	KA 240-12	240,0 - 300,0	13,0	21,0	45,0	116,0	32,0	183,0	1	o. r.	o. r.	o. r.
904719	KA 240-16	240,0 - 300,0	17,0	21,0	45,0	116,0	32,0	176,0	1	o. r.	o. r.	o. r.
904720	KA 240-20	240,0 - 300,0	21,0	21,0	45,0	116,0	32,0	173,0	1	o. r.	o. r.	o. r.
904721	KA 300-16	300,0	17,0	23,3	49,0	124,0	34,0	175,0	1	o. r.	o. r.	o. r.
904722	KA 300-20	300,0	21,0	23,3	49,0	124,0	34,0	173,0	1	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request