


SPR-PU-AS metal cable tube with PUR sheath

with latched profile

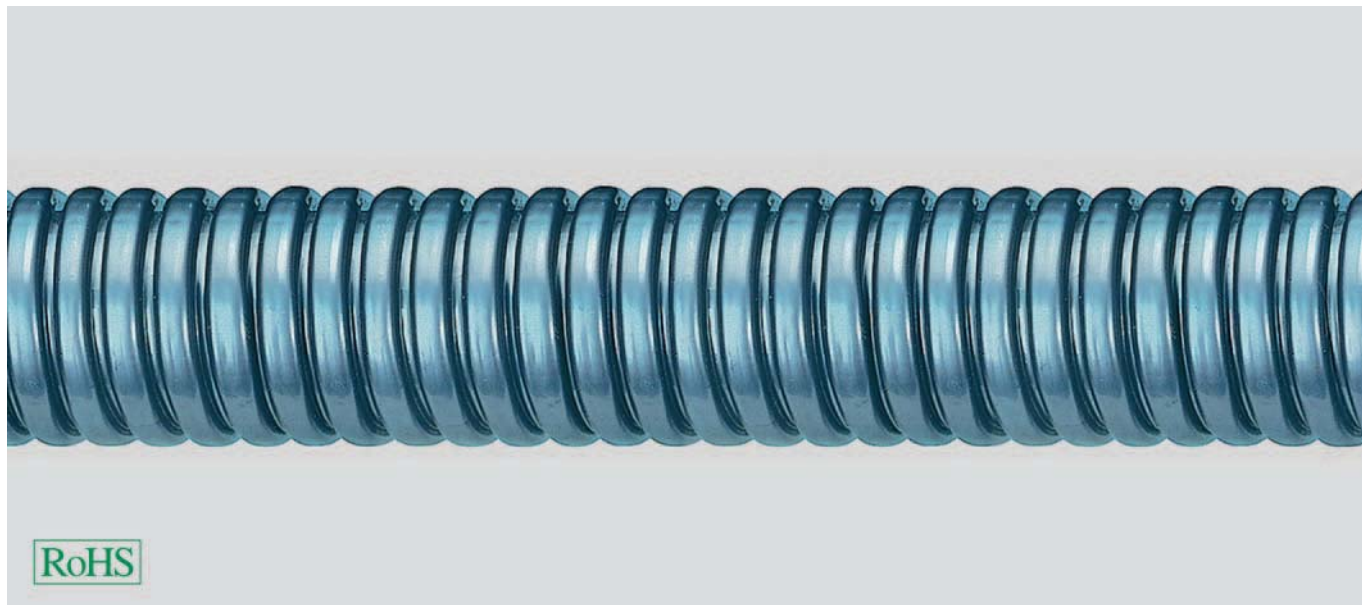

Type SPR-PU-AS

Spiral wound metallic tube with latched profile and steel wire braiding.
High tensile and transverse pressure load rating.

Application

- Plant and machine construction
- Automation technology
- Installation technology
- Control cabinet construction

Material

Cold strip DC 03 acc. to EN 10139, galvanised, Fe/Zn 3

Outer sheath material: Polyurethane

Technical data

Temperature range: -40°C up to +80°C

Note

Suitable connection glands:
US, LI

blue						
Part no. blue	Inner Ø mm	Outer Ø mm	Per metres	Net EUR/100 metres at a purchase of		
				up to 100	101 - 500	501 - 1000
97793	7,0	10,0	50	o. r.	o. r.	o. r.
97794	10,0	14,0	50	o. r.	o. r.	o. r.
91131	13,0	17,0	50	o. r.	o. r.	o. r.
905912	15,0	19,0	50	o. r.	o. r.	o. r.
94738	17,0	21,0	50	o. r.	o. r.	o. r.
97941	22,0	27,0	50	o. r.	o. r.	o. r.
94739	29,0	36,0	25	o. r.	o. r.	o. r.
94714	38,0	45,0	25	o. r.	o. r.	o. r.
90399	49,0	56,0	25	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request