


SPRO - rolls heat shrink 3:1

polyolefine



new

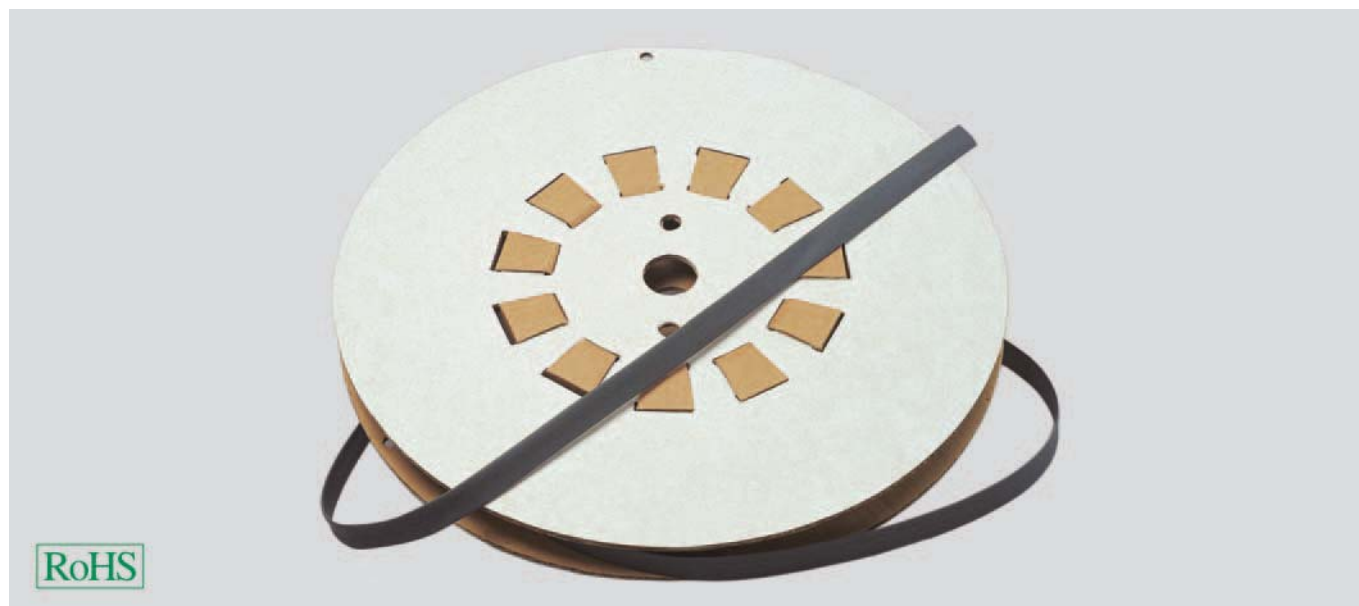

SPRO rolls 3:1

Polyolefine shrunk tube for repairing insulation and sealing electrical components. Shrink rate 3:1

Material

PO (Polyolefine)

Technical data

Temperature range: -55°C up to +135°C

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Rail technology
- Installation technology
- Control cabinet construction

Note

Replace the "x" in the table with the following figures to obtain the product number of your required colour.

Colour code:

1=blue

2=yellow

3=red

9=green

black

Part no. Roll	Inner Ø before shrinkage mm	Wall thickness mm	Inner Ø after shrinkage mm	Content m	Unit	Net EUR/100 metres at a purchase of		
						up to 100	101 - 500	501 - 1000
903035	6,4	0,65	2,0	75,0	-	O. r.	O. r.	O. r.
903045	9,5	0,75	3,0	75,0	-	O. r.	O. r.	O. r.
903055	12,7	0,75	4,0	50,0	-	O. r.	O. r.	O. r.
903065	19,0	0,85	6,0	30,0	-	O. r.	O. r.	O. r.
903075	25,4	1,0	8,0	30,0	-	O. r.	O. r.	O. r.
903085	39,0	1,15	13,0	30,0	-	O. r.	O. r.	O. r.

green/yellow

Part no. Roll	Inner Ø before shrinkage mm	Wall thickness mm	Inner Ø after shrinkage mm	Content m	Unit	Net EUR/100 metres at a purchase of		
						up to 100	101 - 500	501 - 1000
903093	6,4	0,65	2,0	75,0	-	O. r.	O. r.	O. r.
903094	9,5	0,75	3,0	75,0	-	O. r.	O. r.	O. r.
903095	12,7	0,75	4,0	50,0	-	O. r.	O. r.	O. r.
903096	19,0	0,85	6,0	30,0	-	O. r.	O. r.	O. r.
903097	25,4	1,0	8,0	30,0	-	O. r.	O. r.	O. r.
903098	39,0	1,15	13,0	30,0	-	O. r.	O. r.	O. r.

coloured

Part no. Roll	Inner Ø before shrinkage mm	Wall thickness mm	Inner Ø after shrinkage mm	Content m	Unit	Net EUR/100 metres at a purchase of		
						up to 100	101 - 500	501 - 1000
90303x	6,4	0,65	2,0	75,0	-	O. r.	O. r.	O. r.
90304x	9,5	0,75	3,0	75,0	-	O. r.	O. r.	O. r.
90305x	12,7	0,75	4,0	50,0	-	O. r.	O. r.	O. r.
90306x	19,0	0,85	6,0	30,0	-	O. r.	O. r.	O. r.
90307x	25,4	1,0	8,0	30,0	-	O. r.	O. r.	O. r.
90308x	39,0	1,15	13,0	30,0	-	O. r.	O. r.	O. r.

Dimensions and specifications may be changed without prior notice.

O. r. = on request