


SVRO heat shrink 2:1 - high resistant

FKM

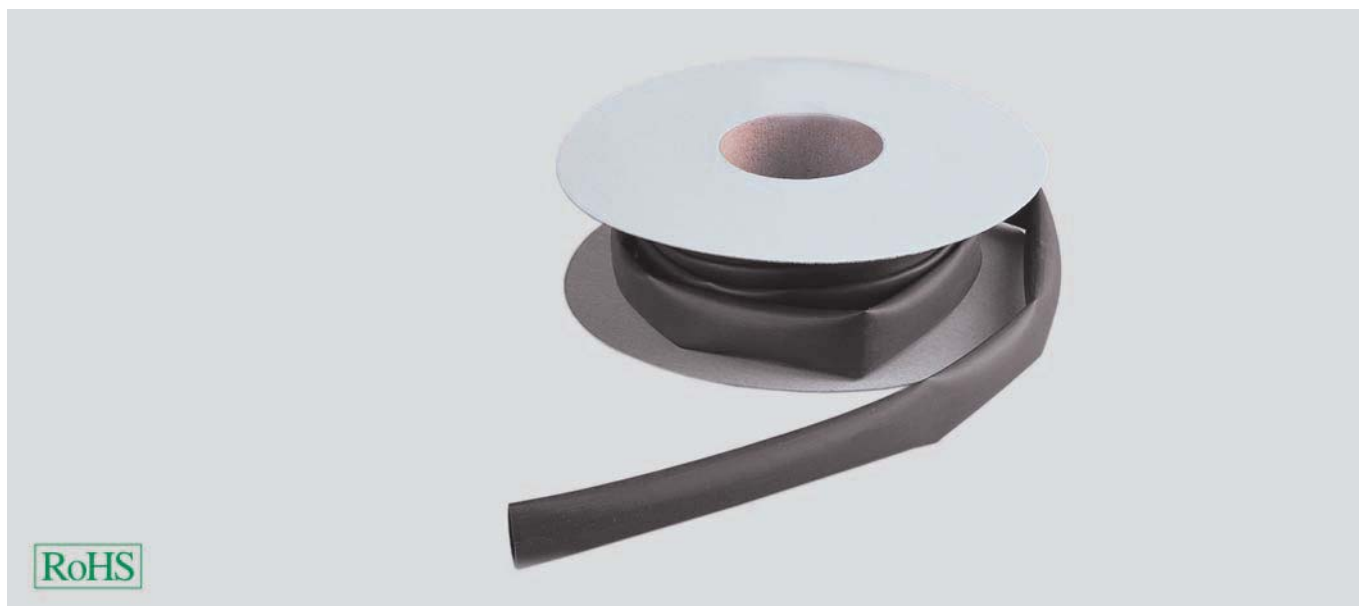

SVRO

FKM shrunk tube to protect against aggressive media.

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Installation technology
- Control cabinet construction

Material

FKM

Colour: black

Properties

Weather, flame and chemical resistant

Note

MIL-I-23053

Technical data

Temperature range: -55°C up to +220°C

black

Part no.	Inner Ø before shrinkage mm	Wall thickness mm	Inner Ø after shrinkage mm	Content m	Unit	Net EUR/100 metres at a purchase of		
						up to 100	101 - 500	501 - 1000
96796	3,2	0,0	1,6	50,0	-	o. r.	o. r.	o. r.
97385	4,8	0,0	2,4	50,0	-	o. r.	o. r.	o. r.
97774	6,4	0,0	3,2	50,0	-	o. r.	o. r.	o. r.
91165	9,5	0,0	4,8	50,0	-	o. r.	o. r.	o. r.
91166	12,7	0,0	6,4	30,0	-	o. r.	o. r.	o. r.
93690	19,0	0,0	9,5	30,0	-	o. r.	o. r.	o. r.
93691	25,4	0,0	12,7	30,0	-	o. r.	o. r.	o. r.
93692	38,0	0,0	19,0	15,0	-	o. r.	o. r.	o. r.
93693	50,8	0,0	25,4	15,0	-	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request