

# UNI-DICHT-ASI-PA cable gland



profile fits to ASI-bus line



## UNI-DICHT-ASI-PA

Plastic sealing cable gland with inserts made by TPE-V. Profile fitting to ASI- bus line.

### Application

- Plant and machine construction
- Robot construction
- Automation technology
- Installation technology
- Control cabinet construction

### Material

Polyamide  
Moulded seal: TPE-V

- halogen-free
- phosphor-free
- silicone-free
- cadmium-free

### Properties


- Large-area cable sealing
- Easy to assemble

### Technical data

Protection class: IP 68 - 10 bar

Temperature range: -20°C up to +100°C

Test standard: EN50262

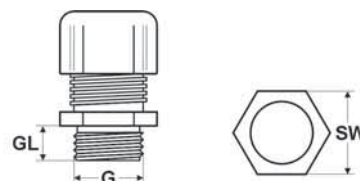

### Dimensions

G Thread size  
GL Thread length  
SW Spanner size

#### metric thread

| Part no. | Size Metr. | Sealing insert colour | Cable Ø from / to mm | Thread length mm | Spanner size mm | Unit | Net EUR/100 items at a purchase of |           |            |
|----------|------------|-----------------------|----------------------|------------------|-----------------|------|------------------------------------|-----------|------------|
|          |            |                       |                      |                  |                 |      | up to 100                          | 101 - 500 | 501 - 1000 |
| 903796   | M20 x 1,5  | grey, left            | -                    | 9,0              | 24              | 50   | o. r.                              | o. r.     | o. r.      |
| 903797   | M20 x 1,5  | grey, right           | -                    | 9,0              | 24              | 50   | o. r.                              | o. r.     | o. r.      |

#### PG thread


| Part no. | Size PG | Sealing insert colour | Cable Ø from / to mm | Thread length mm | Spanner size mm | Unit | Net EUR/100 items at a purchase of |           |            |
|----------|---------|-----------------------|----------------------|------------------|-----------------|------|------------------------------------|-----------|------------|
|          |         |                       |                      |                  |                 |      | up to 100                          | 101 - 500 | 501 - 1000 |
| 903798   | 13,5    | grey, left            | -                    | 9,0              | 24              | 50   | o. r.                              | o. r.     | o. r.      |
| 903799   | 13,5    | grey, right           | -                    | 9,0              | 24              | 50   | o. r.                              | o. r.     | o. r.      |

Dimensions and specifications may be changed without prior notice.

o. r. = on request

# UNI-DICHT sealing insert

profile fits to ASI-bus line

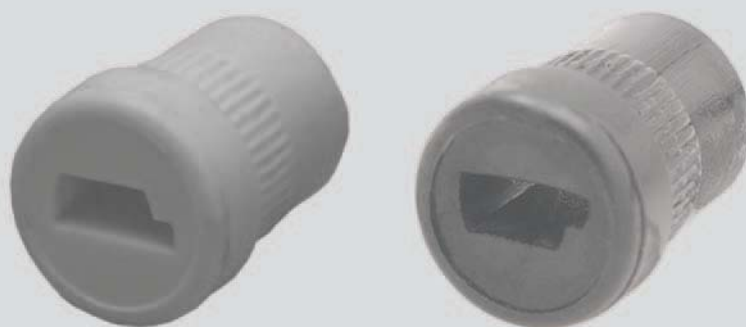

## UNI-DICHT Sealing insert ASI

Sealing inserts made of TPE-V for populating UNI-DICHT gland bodies made of polyamide or of brass. Profile fits to ASI- bus line.

### Application

- Plant and machine construction
- Robot construction
- Automation technology
- Installation technology
- Control cabinet construction

## Material

TPE-V

- halogen-free
- phosphor-free
- silicone-free
- cadmium-free

## Properties

- Large-area cable sealing
- Easy to assemble

## Note

UNI-DICHT inserts M20 with part nos. 905910 and 905911 are suitable for UNI-DICHT gland body made of polyamide. The part nos. 903992 and 903993 are suitable for UNI-DICHT gland body M20 made of brass and for UNI-DICHT body gland PG 13,5.

## Technical data

Temperature range: -20°C up to +100°C

| Part no. | Size PG | Size metric | Sealing insert colour | Cable Ø from / to mm | Unit | Net EUR/100 items at a purchase of |           |            |
|----------|---------|-------------|-----------------------|----------------------|------|------------------------------------|-----------|------------|
|          |         |             |                       |                      |      | up to 100                          | 101 - 500 | 501 - 1000 |
| 903992   | 13,5    | M20 x 1,5   | grau, links           | -                    | 50   | o. r.                              | o. r.     | o. r.      |
| 903993   | 13,5    | M20 x 1,5   | grau, rechts          | -                    | 50   | o. r.                              | o. r.     | o. r.      |
| 905910   | -       | M20 x 1,5   | grau, links           | -                    | 50   | o. r.                              | o. r.     | o. r.      |
| 905911   | -       | M20 x 1,5   | grau, rechts          | -                    | 50   | o. r.                              | o. r.     | o. r.      |

Dimensions and specifications may be changed without prior notice.

o. r. = on request