

UNI-DICHT-VK-MS gland body



UNI-DICHT gland body MS

Gland body made of brass for populating with inserts made by TPE.

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Rail technology
- Installation technology
- Control cabinet construction

Material

Brass, nickel plated

Note

Gland body M20x1.5 (part No. 904212) is populated by inserts PG11; part No. 9042313 is used with inserts PG13.5.


Part Nos. 904215 and 904225 cap aperture 18mm.

Part Nos. 904216 and 904226 cap aperture 21mm.

Technical data

Temperature range: up to +200°C

Test standard: EN50262

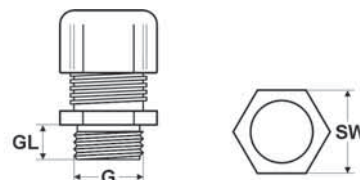

Dimensions

G Thread size
GL Thread length
SW Spanner size

metric thread

Part no.	Size Metr.	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
					up to 100	101 - 500	501 - 1000
904210	M12 x 1,5	5,0	14	50	o. r.	o. r.	o. r.
904211	M16 x 1,5	6,0	18	50	o. r.	o. r.	o. r.
904212	M20 x 1,5	6,5	22	50	o. r.	o. r.	o. r.
904213	M20 x 1,5	6,5	22	50	o. r.	o. r.	o. r.
904214	M25 x 1,5	7,5	28	50	o. r.	o. r.	o. r.
904215	M32 x 1,5	8,0	35	25	o. r.	o. r.	o. r.
904216	M32 x 1,5	8,0	35	25	o. r.	o. r.	o. r.
904217	M40 x 1,5	8,0	43	10	o. r.	o. r.	o. r.
904218	M50 x 1,5	10,0	54	5	o. r.	o. r.	o. r.
904219	M63 x 1,5	10,0	68	5	o. r.	o. r.	o. r.

PG thread

Part no.	Size PG	Thread length mm	Spanner size mm	Unit	Net EUR/100 items at a purchase of		
					up to 100	101 - 500	501 - 1000
904220	7	5,0	14	50	o. r.	o. r.	o. r.
904221	9	6,0	17	50	o. r.	o. r.	o. r.
904222	11	6,0	20	50	o. r.	o. r.	o. r.
904223	13,5	6,5	22	50	o. r.	o. r.	o. r.
904224	16	6,5	24	50	o. r.	o. r.	o. r.
904225	21	7,0	30	25	o. r.	o. r.	o. r.
904226	21	7,0	30	25	o. r.	o. r.	o. r.
904227	29	8,0	40	10	o. r.	o. r.	o. r.
904228	36	9,0	50	10	o. r.	o. r.	o. r.
904229	42	10,0	57	5	o. r.	o. r.	o. r.
904230	48	10,0	64	5	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request