


# PV-CM compression joint

not insulated

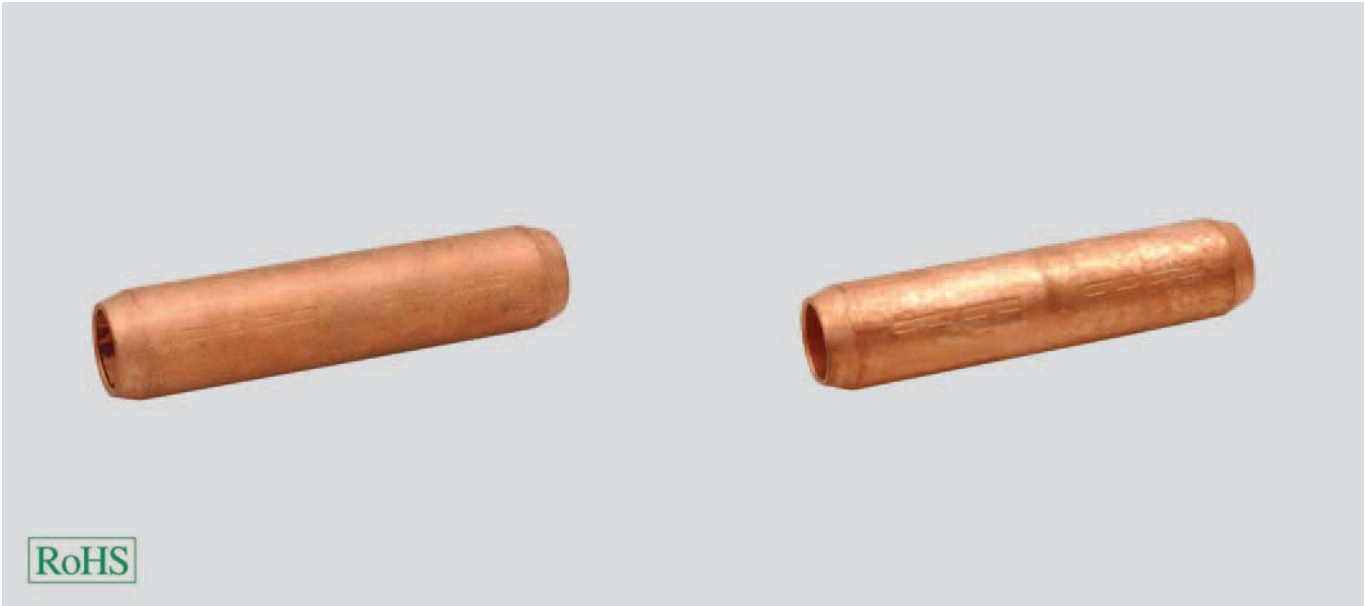

## Compression joint PV-CM


Clamping connection sleeves for unstrained clamping of Cu medium-range voltage cables 10-30 kV.

## Material

copper  
Surface: bare

## Note

Code type indicates the required hexagonal clamping insert.



## Dimensions

d Inner diameter of the cable inclusion  
l Length

## bare

Part no.	Type	Cross-section mm <sup>2</sup>	d mm	l mm	Code type	Weight kg / 1000 items	Unit	Net EUR/100 items at a purchase of		
								up to 100	101 - 500	501 - 1000
99440	PV-CM 25	25,0	7,5	60,0	12,0	40,8	10	o. r.	o. r.	o. r.
99441	PV-CM 35	35,0	8,2	60,0	12,0	35,6	10	o. r.	o. r.	o. r.
99442	PV-CM 50	50,0	10,0	65,0	14,0	49,0	10	o. r.	o. r.	o. r.
99443	PV-CM 70	70,0	11,5	65,0	16,0	61,0	10	o. r.	o. r.	o. r.
99444	PV-CM 95	95,0	13,5	90,0	18,0	109,8	10	o. r.	o. r.	o. r.
99445	PV-CM 120	120,0	15,5	90,0	20,0	126,8	5	o. r.	o. r.	o. r.
99446	PV-CM 150	150,0	17,0	105,0	22,0	180,9	5	o. r.	o. r.	o. r.
99447	PV-CM 185	185,0	19,0	105,0	25,0	203,5	5	o. r.	o. r.	o. r.
99448	PV-CM 240	240,0	21,5	125,0	28,0	316,4	5	o. r.	o. r.	o. r.
99449	PV-CM 300	300,0	24,5	125,0	32,0	354,0	1	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request